

DAA Series

PSC 4 POLE
60 PSI max. pressure, 2.4 cfm open flow

PSC 2 POLE
60 PSI max. pressure, 3.8 cfm open flow

PSC 4 POLE (SINGLE STAGE)
25.5" HG max vacuum, 2.2 cfm open flow

PSC 2 POLE (SINGLE STAGE)
25.5" HG max vacuum, 3.6 cfm open flow

PSC 4 POLE (TWO STAGE)
29.0" HG max vacuum, 1.15 cfm open flow

PSC 2 POLE (SINGLE STAGE)
29.0" HG max vacuum, 2.0 cfm open flow

PRODUCT FEATURES

- Oilless operation
- Motor mounted
- Rugged construction/low maintenance


INCLUDES

- Muffler AH190A for vacuum
- Capacitor AF876 (EB motors), AF873A (ED motors), AF485 (GB and GD motors)

RECOMMENDED ACCESSORIES

- Pressure gauge AF583/Vacuum gauge AA640
- Pressure relief valve AF887 / Vacuum relief valve AA550C-V
- (4) rubber feet AF584A
- Repair Kit K294A (use 2)

Product Dimensions (in. mm)

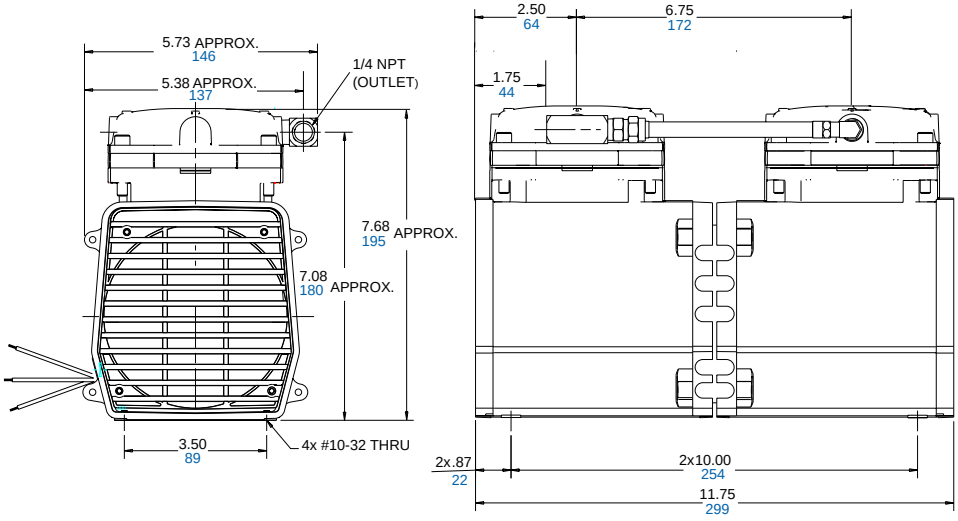

Product Specifications


Note: All models listed below are vacuum models only except for the V4 (lab models) which are set up for vacuum *or* pressure.

Model Number	Motor	Motor Type Stages for Vacuum Models	RPM 60 Cycle	RPM 50 Cycle	HP	kW	Net Wt. lbs.	Net Wt. kg
DAA-P501-EB	100/115-50/60-1	PSC (4 pole)	1575	1275	1/4	0,19	28	12,7
DAA-P501-ED	220/230-50/60-1	PSC (4 pole)	1575	1275	1/4	0,19	28	12,7
***DAA-P517-ED**	220/230-50/60-1	PSC (4 pole)	1575	1275	1/4	0,19	28	12,7
****DAA-P513-EG**	240-50-1	PSC (4 pole)	-----	1275	1/4	0,19	28	12,7
*****DAA-P501-GB**	110/115-50/60-1	PSC (2 pole)	3000	2500	1/2	0,37	28	12,7
+DAA-P503-GB	110/115-50/60-1	PSC (2 pole)	3000	2500	1/2	0,37	28	12,7
*****DAA-P501-GD**	220/230-50/60-1	PSC (2 pole)	3000	2500	1/2	0,37	28	12,7
+DAA-P503-GD	220/230-50/60-1	PSC (2 pole)	3000	2500	1/2	0,37	28	12,7
++DAA-P512-GD	220/230-50/60-1	PSC (2 pole)	3000	2500	1/2	0,37	28	12,7
DAA-V505-EB	110/115-50/60-1	PSC (4 pole) single stage	1575	1275	1/4	0,19	23	10,4
DAA-V502-EB	110/115-50/60-1	PSC (4 pole) two stage	1575	1275	1/4	0,19	23	10,4
DAA-V505-ED	220/230-50/60-1	PSC (4 pole) single stage	1575	1275	1/4	0,19	23	10,4
DAA-V502-ED	220/230-50/60-1	PSC (4 pole) two stage	1575	1275	1/4	0,19	23	10,4
****DAA-V510-EG**	240-50-1	PSC (4 pole) two stage	-----	1275	1/4	0,19	23	10,4
DAA-V505-GB	110/115-50/60-1	PSC (2 pole) single stage	3000	2500	1/2	0,37	23	10,4
DAA-V507-GB	110/115-50/60-1	PSC (2 pole) two stage	3000	2500	1/2	0,37	23	10,4
DAA-V505-GD	220/230-50/60-1	PSC (2 pole) single stage	3000	2500	1/2	0,37	23	10,4
DAA-V507-GD	220/230-50/60-1	PSC (2 pole) two stage	3000	2500	1/2	0,37	23	10,4

* Available only in Europe
**Capacitor mounted on unit in mini-box, two meter cord (European color-coded), no plug
***Capacitor unattached, no manifold
+Capacitor unattached, parallel manifold for pressure (single stage only)
++Capacitor attached, parallel manifold for pressure (single stage only)

Product Performance

Single Stage

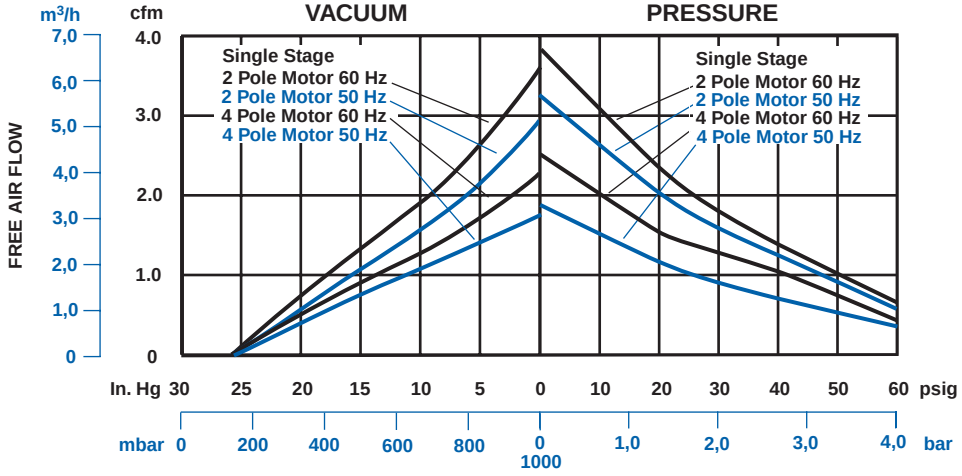

Two Stage

